

Rec'd PCT/PTO 18 MAR 2005



10/528422
PCT/03/01187

REC'D 30 SEP 2003

WIPO

PCT

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Patent Office
Canberra

I, JONNE YABSLEY, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. 2002951534 for a patent by OCCUPATIONAL & MEDICAL INNOVATIONS PTY LTD as filed on 20 September 2002.



WITNESS my hand this
Nineteenth day of September 2003

J R Yabsley

JONNE YABSLEY
TEAM LEADER EXAMINATION
SUPPORT AND SALES

BEST AVAILABLE COPY

IMPROVEMENTS TO A SURGICAL SCALPEL WITH RETRACTABLE GUARD

FIELD OF THE INVENTION

This invention relates to various improvements to a surgical
5 scalpel which has a retractable guard to reduce the incidence of sharps injury.
The invention will be described with reference to a surgical scalpel but it
should be appreciated that the invention can be construed broadly enough to
cover any other type of cutting implement which requires safe handling
procedures.

BACKGROUND ART

Surgical scalpels or surgical knives which are in commercial use
have a handle and a disposable blade. The blade can be detached from the
handle and disposed of by deposit in a special container which can thereafter
be handled with reduced hazard of sharps injury.

15 A sharps injury means any cutting or penetrating object that can be
reasonably anticipated to penetrate the skin or other part of the body to result
in an exposure incident which includes occupational exposure to blood and
other potentially infectious materials. Clearly, this covers scalpels and other
types of surgical knives.

20 The commercially available scalpels which have a disposable
blade generally have reusable handles. The handle can be sterilised by
autoclaving and reused, and these handles are usually formed from metal.

The surgical blade comes packaged in a protective foil. The foil
is carefully opened to expose the blade. The blade is then held between
25 thumb and finger and carefully attached to an extending projection of finger
on the handle. Upon completion of the surgical procedure, the blade is either
manually detached from the handle and placed in a sharps bin, or the handle
with the blade is inserted into a container which breaks off the blade.

It can be seen that attachment of the blade to the handle is a
30 hazardous procedure and can easily result in a sharps injury. If the blade is
manually detached, this can also result in a sharps injury which is even more
hazardous as the blade may be contaminated.

During surgical use, the scalpels can accidentally cut the

surgeon's fingers, or the fingers of nurses and other support persons in the operating theatre. As well, operating personnel can be accidentally cut when the scalpel is passed between personnel.

To partially mitigate against accidental sharps injuries in
5 handling the scalpel, it is known to provide a retractable blade guard. The blade guard is attached to the handle, and can be manually pushed between an extended blade guarding position, and a retracted blade exposed position. Thus, blade guards attached to scalpel handles are known.

These blade guards have some disadvantages. Firstly, by being
10 part of the handle, the handle must be thoroughly cleaned from any blood and tissue after use, if the handle is to be reused. The blade guard can catch and contain tissue, congealed blood, and the like in the various nooks and cavities in the blade guard and it is extremely difficult to ensure that the blade guard is absolutely spotlessly clean to allow the handle with the attached blade guard
15 to be reused. To allow the handle to be reused many times, the blade guard must be fairly robust and this can result in the guard being of fairly complex manufacture, quite bulky, and quite expensive.

A second disadvantage with this arrangement is that the blade guard cannot protect against initial attachment of the sterile blade to the
20 handle. That is, the blade guard must be fully retracted to expose the projection or finger on the handle to which the blade is attached. The blade must be attached in the usual manner which is to initially remove it from its protective foil and then physically attach it to the handle. Thus, existing blade guards do not reduce or eliminate sharps injuries which can result in initial
25 attachment of the blade. As well, these guards do not protect against removal of the blade from the handle.

Our earlier international patent application WO 01/05312 described a surgical scalpel with a retractable guard. The device overcame many of the above-mentioned disadvantages. The present invention is
30 directed to some improvements with respect to a surgical scalpel with a retractable guard, and particularly to improvements in respect of the device described in our earlier international patent application.

OBJECT OF THE INVENTION

The present invention is directed to improvements to an assembly which contains a blade attached to a blade guard. The assembly can be packaged within a sterile foil (similar to conventional blades). The assembly can be removed from the foil and can be safely handled with little risk of the blade cutting the person, and the assembly can be attached to a scalpel handle with the blade guard in place. When the assembly is attached to the scalpel handle, the blade guard can then be retracted fully or partially to expose the blade. When the surgical procedure is finished, the blade guard can be pushed back over the blade and the blade and blade guard can be removed from the handle for safe disposal. In this arrangement, the handle itself does not keep the blade guard as the guard is disposed with the blade after use.

With this arrangement, there is reduced likelihood of sharps injuries in attachment of a blade to the handle. As well, the handle does not keep the guard which means that the handle can be more easily cleaned and sterilised for reuse. The guard can stay with the blade when the blade is removed which reduces the incidence of sharps injury when removing the blade from the handle

It is an object of the invention to provide a scalpel blade assembly, and a scalpel which may at least partially overcome the abovementioned disadvantages or provide the public with a useful or commercial choice.

In one form, the invention resides in a means to improve the method of attachment of the blade assembly to a handle.

In this form, the invention comprises the provision of a removable tab on the blade assembly and which can allow the blade assembly to be attached to the handle without contacting the blade. Thus, there is a reduced likelihood of a sharps incidence when attaching the blade assembly to the handle.

Thus, one form of this invention comprises a safety scalpel blade assembly adapted for attachment to a handle of the type which has a blade carrier in the form of a finger, the assembly comprising a scalpel blade

which can be of conventional manufacture, the scalpel blade having a slot to allow the blade to be attached to the blade carrier on the handle, and a guard which extends at least about the cutting edge of the blade, the guard having attachment means to lock the blade to the guard as the assembly is being
5 attached to the handle and which releases the blade from the guard when the blade is attached to the blade carrier on the handle, and a removable tab on the guard having a portion which can be gripped by a person .

Suitably, the removable tab has a head portion and a tail portion. The head portion suitably extends forwardly of the blade assembly. The tail portion
10 suitably extends at least partially into a slot which is present in the guard.

Suitably, the removable tab is attached to the guard via at least one breakable portion. Suitably, a plurality of breakable portions are provided. These breakable portions are preferably on the tail portion of the removable tab.

15 Suitably, the breakable portions comprise a first breakable portion (a first neck) and a second breakable portion (a second neck). It is preferred that the first breakable portion is closer to the head portion of the removable tab and can break more easily than the second breakable portion.

Thus, the first breakable portion may be sized for immediate breakage. The
20 second breakable portion may be more difficult to break and may require both a twisting action and a leveraged action against the underside of the blade to break to ensure that the head of the safety tab has moved sufficiently away from the blade exposure to be safely operated by hand.

Thus the function of the tab can be to initially prevent retraction
25 of the guard and exposure of the blade, until the tab is removed after which the guard can be retracted and the blade exposed. Thus the tab provides an improvement to the invention by preventing inadvertent or premature exposure of the blade.

The head portion of the removable tab can either be gripped by
30 a person or may be placed against a solid surface and pushed, both options allowing the assembly to be attached with a reduced likelihood of being cut by the blade.

In another form the invention resides in an improvement to a

surgical scalpel with a retractable guard and which contains a blade assembly, the blade assembly comprising a blade and a blade guard, the improvement comprising means to reduce the ability of the blade guard from lifting relative to the handle.

5 This improvement overcomes a disadvantage with earlier devices and especially earlier devices which comprise a larger handle and a relatively large guard. The disadvantage was that is the guard had a degree of flexibility and could inadvertently be removed from the handle thereby presenting a sharps hazard situation.

10 In one form, the means and comprise an engagement means on the handle and which engages the guard. The engagement means may comprise an elongated rib or rail in the handle, and a corresponding groove or slot in the guard (or vice versa) such that the guard can slide between the forward and the retracted position but is held against being lifted by the
15 engagement of the rib or rail in the groove or slot. Of course, other means to prevent the guard from being lifted relative to the handle are envisaged.

 Another means to prevent the guard from being inadvertently removed may comprise a means to prevent the guard from being retracted too far thereby creating the possibility that the guard can be pushed out of
20 engagement with the handle.

 In one form, this means may comprise an engagement means such as a safety catch which prevents excessive retraction of the guard. The safety catch may be provided on the guard can preferably on a forward portion of the guard. The safety catch may comprise a peg or similar type of
25 member.

 Another improvement to the scalpel with retractable guard comprises a means to positively locate the guard in the extended position and the retracted position. The means may comprise at least one projection which can releasably engage in at least one recess when the guard is in the
30 extended position and the retracted position. The arrangement may be such that an audible "click" is heard when the guard is in the extended position or the retracted position, or that a tactile response is felt.

 In each improvement, the scalpel blade assembly may be of the

type described in our earlier international patent application and may comprise a scalpel blade assembly comprising a scalpel blade, a guard which extends at least about the cutting edge of the blade, and releasable attachment means to releasably attach the blade to the guard, the attachment
5 means being operable between a locking position where the blade is held relative to the guard such that the cutting edge is protected by the guard, and a free position where the blade can slide out of the guard.

In a more particularised form, the safety scalpel blade assembly which is able to be attached to a handle of the type comprises a blade carrier
10 in the form of a finger, the assembly comprising a scalpel blade which can be of conventional manufacture and which has a slot which allows the blade to be attached to the blade carrier on the handle, and a guard which extends at least about the cutting edge of the blade, the guard having attachment means which locks the blade to the guard as the assembly is being attached to the
15 handle thereby preventing the blade from cutting a person, but which releases the blade from the guard when the blade is attached to the blade carrier on the handle.

In another form, the invention resides in improvements to a scalpel comprising a scalpel blade assembly and a handle, the scalpel blade
20 assembly having:

a scalpel blade, a guard which extends at least about the cutting edge of the blade, and releasable attachment means to releasably attach the blade to the guard, the attachment means being operable between a locking position where the blade is held relative to the guard such that the cutting edge is
25 protected by the guard, and a free position where the blade can slide out of the guard, the handle having:

a portion which is releasably lockable to the blade, the handle further having guide means which engages with the guard when the handle is attached to the blade to allow the guard to slide along the guide means on the handle
30 between a retracted position where at least a portion of the cutting edge of the blade is exposed, and an extended position where the cutting edge of the blade is protected,

the scalpel further having means to move the attachment means to its free

position when the handle is attached to the blade, and at least one improvement as described above.

5 The scalpel blade assembly has the scalpel blade initially attached to a blade guard. The assembly can be packed in a sterile foil and the foil can be opened to safely remove the blade and the blade guard. The assembly can then be attached to a scalpel handle and thereafter the guard can be retracted to expose the scalpel blade.

10 The scalpel blade can be of various types depending on the surgical procedure to be carried out. It is usual for the blade to be elongate and to have a forward cutting edge. The blade body is provided with an elongate slot extending therethrough and the slot allows the blade to be attached to a projection or finger on the handle. This arrangement is entirely conventional. The invention is envisaged to cover surgical devices which may be other than a blade but which also are attachable to a handle and
15 which require safe handling procedures.

The guard extends at least about the cutting edge of the blade to protect against sharps injury. The guard may be formed from plastics material although other materials are envisaged. As the blade assembly is disposed of after use, it is preferred that the guard is made of fairly
20 inexpensive material which is however still suited for use and which can be sterilised.

The guard can extend substantially around the blade to form a shroud or sleeve. The forward end of the guard (that is the end where the front of the blade sits) should be open or have a passageway to allow the
25 blade to extend from the guard. To facilitate attachment of the blade/guard assembly to the handle, the guard may be required to have an opening or slot to allow the handle to be attached to the blade while the guard is still in place, and to allow the guard to be retracted from the blade when the blade is attached to the handle.

30 The assembly has a releasable attachment means. The releasable attachment means functions to initially attach the blade to the guard such that when the blade/guard assembly is removed from its protective package, the blade does not inadvertently fall out of the guard or

expose a cutting edge. The attachment means can also function to hold the blade in the guard when the blade is removed for disposal. In one form, this can be achieved by a projection or button on the guard which extends into the slot in the blade body (the slot being where the handle attaches to the blade).

5 The projection or button therefore prevents the blade from inadvertently sliding out of the guard and presenting a cutting edge.

 If desired, the guard may be provided with a further projection, or fin which extends into the slot in the blade and can function to prevent the blade from "rattling" in the guard.

10 The releasable attachment means may also be slightly biased, inter alia to push the blade against a wall of the guard again to prevent the blade from rattling or exhibiting undesired movement in the guard.

 The blade assembly can be attached to a scalpel or knife handle. The knife handle can have a forward projection or finger which has a profile to allow it to releasably lock to the slot in the blade. This arrangement is known in the art. The handle can be provided with means to release the blade from the guard when the handle is attached to the blade. In one form, the projection or finger on the handle can have a profile such that when it attaches to the blade, it also releases the blade from the guard thereby
15 allowing the guard to be retracted to expose the blade.
20

 The handle is provided with guide means to engage with the guard and to allow the guard to slide between retracted and extended positions. The guide means can be in the form of a recess in the handle in which the guide slides.

25 The guard can be retracted from the blade to expose various lengths of the blade. For instance, means may be provided to allow the guard to be releasably locked or held in various retracted positions to expose various lengths of the blade. This allows the cutting depth of the blade to be adjusted, and can also ensure that only a necessary amount of blade is
30 exposed with the remainder of the blade still being protected by the guard, the purpose being to further minimise accidental injury.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the invention will be described with reference to the following figures in which

Figure 1 is an exploded view of a known scalpel showing the scalpel blade,
5 the blade guard, and the scalpel handle.

Figure 2 shows the known scalpel blade assembly with the blade initially held within the guard.

Figure 3 shows the known blade attached to the handle with the guard in the retracted position exposing the blade.

10 Figure 4 is an enlarged view of the known blade guard illustrated in Figure 1.

Figures 5A-5C show top, bottom and section views of a known blade guard according to an alternative embodiment.

Figures 6A-6B illustrate a known mouldable blade guard.

15 Figures 7A-7G illustrate a known guard according to a second embodiment.

Figure 8. Illustrates a scalpel having a blade assembly attached and showing a safety tab which comprises an improvement.

Figure 9. Illustrates the safety tab in greater detail.

20 Figure 10. Illustrates a top view of the scalpel of figure 8.

Figure 11. Illustrates a side view of the scalpel of figure 8.

Figure 12. Illustrates the safety tab being removed from the guard.

Figure 13. Illustrates the safety tab being removed from the guard.

Figure 14. Illustrates a top view of the scalpel having the safety tab being
25 removed from the guard.

Figure 15. Illustrates the safety tab completely removed.

Figure 16. Illustrates a further improvement which comprises a handle provided with engagement means to prevent the guard from being lifted out of the recess in the handle.

30 Figure 17. Illustrates the handle of figure 16 with the guard attached.

Figure 18. Illustrates a section view of the guard.

Figure 19. Illustrates a section view of the handle in the recessed area of the handle.

Figure 20. Illustrates a front view of the guard according to this improvement.

Figure 21. Illustrates a rear view of the guard of figure 20

Figure 22. Illustrates the front portion of the scalpel showing an engagement means to prevent over retraction of the guard according to a further improvement.

Figure 23. Illustrates the scalpel of figure 22 with the guard next to the scalpel.

Figure 24. Illustrates the scalpel of figure 23 in greater detail.

10 Figure 25. Illustrates a side view of the scalpel containing the guard.

Figure 26. Illustrates a section view of the front part of a scalpel according to another improvement which is directed to allowing the guard to "click" into the forward position and the rear position.

Figure 27. Illustrates a top view of the scalpel of figure 26.

15 Figure 28. Illustrates a side view of the scalpel of figure 26

Figure 29. Illustrates a perspective view of the scalpel of figure 26

BEST MODE

Referring to Figures 1 and 7, there are illustrated two versions of a known scalpel which consist of three main components being a scalpel blade 10, a blade guard 11, and a scalpel handle 12. Blade 10 is of conventional design and is widely available in the marketplace. The blade is formed of stainless steel, has a forward cutting edge, and is provided with an elongate profile slot 13 which is again entirely conventional. Handle 12 has a forwardly extending projection or finger 14 which is profile and has opposed side recesses or grooves 15 (only one groove illustrated). Blade 10 is attached to finger 14 with the internal edges of slot 13 sliding along grooves 15. This is again conventional in the art.

Figure 1 illustrates guard 11 which functions to cover or protect the cutting edge of blade 10 as the blade is attached. That is, blade 10 can be attached with guard 11 in place such that at no stage does a person's hand contact the cutting edge of the blade as the blade is attached to finger 14.

Figures 2 and 8 illustrate two versions of a scalpel blade assembly which consist of blade 10 and guard 11 with blade 10 now being

entirely within guard 11. Guard 11 in Figures 2 and 8 is the same as guard 11 in Figures 1 and 7 except Figures 2 and 8 are inverted views of the guard of Figures 1 and 7

Guard 11 can be formed from relatively inexpensive plastic material and is preferably clear or at least translucent such that that the blade can be seen through the guard. The guard substantially encompasses the blade to form a shroud or sleeve. The front 16 of the guard is open such that the guard can be retracted to expose blade 10. One side wall of guard 11 is provided with an elongate slot 17 which extends entirely along the side wall from the front 16 to the rear wall 18 of the guard. The function of slot 17 is to not interfere with retraction of the guard when blade 10 is attached to finger 14.

Guard 11 has a releasable attachment means which functions to hold blade 10 in guard 11 (see Figures 2 and 8) before the blade/guard assembly is attached to scalpel handle 12. In the embodiment of Figure 2, the releasable attachment means is in the form of a projection or button 19 which is also illustrated in Figure 5C. Button 19 sits at one end of a flat finger 20 (see Figure 1). Finger 20 is integrally formed with the remainder of guard 11 and is able to be depressed by virtue of its finger-like quality

A protective raised wall 21 extends around finger 20 but finger 20 is not attached to wall 21 which means that finger 20 can pivot or be depressed within the confines of wall 21. Wall 21 functions inter alia to protect the rather small finger against unintentional movement, or damage.

In the embodiment of Figures 7 and 8, the raised wall is not present. The projection 50 (see also Figure 12) has a ramped wall 51 extending from finger 20.

In use, the scalpel blade assembly as illustrated in Figures 2 and 8 is assembled and can be placed in a foil package in a manner similar to current scalpel blades. The assembly can be removed from a foil package and it can be seen from Figures 2 and 8 that button 19,50 holds the blade within guard 11 and therefore the assembly can be picked up by guard 11 which means that there is little or no likelihood of the blade causing a stick injury.

The assembly can then be placed onto finger 14 with finger 14 passing into slot 13 to attach the blade to finger 14. Finger 14 is profile such that when it extends into slot 13, it also pushes away button 19,50 against the bias of finger 20. This in turn releases blade 10 from its housing 11. For as long as blade 10 is attached to finger 14, the profile of finger 14 keeps button 19,50 out of slot 13 and therefore prevents button 19,50 from reengaging with the blade. Upon removal of the blade and guard assembly, the guard is first pushed to the forward position where it covers the blade and then the blade is decoupled from finger 14. As soon as this occurs, button 19,50 is released and the with bias of finger 20 will re-enter into slot 13 to again hold the blade within the guard. The blade and guard assembly can now be safely disposed of in a sharps bin with little or no likelihood of stick injury resulting.

Finger 20 is biased to bias button 19,50 into slot 13. In Figure 2, button 19 extends from a larger shoulder portion 22 (more clearly illustrated in Figures 5B and 5C). Shoulder portion 22 is too large to extend through slot 13 but instead abuts against one side of the blade. With the biasing action of finger 20, shoulder portion 22 functions to gently push the blade against one side wall of guard 11 and prevents the blade from rattling or from exhibiting unintentional movement. The position of button 19 is such that when blade 10 is within guard 11 (see Figure 2), the button is adjacent the rear portion of slot 13. This prevents the blade from further extension out of the guard.

Movement of the blade in the other direction is prevented as rear end 18 of guard 11 does not have an open end as does the front 16. Thus, blade 10 is essentially trapped within housing 11 until such time as the assembly is attached to finger 14 which in turn pushes button 19 out of engagement with slot 13. In Figures 8,12 and 13, button 50 has opposed shoulder portions 52 which serve the same function as shoulder portion 22 in Figure 2.

Handle 12 has a guide means 23 which in the embodiment is in the form of a recess 24 on the forward portion of handle 12 and immediately behind finger 14. The recess is sufficiently long such that guard 11 can be pulled back to fully expose blade 10. This fully retracted blade exposing position is illustrated in Figures 3 and 9. The recess 24, which forms part of

the guide means in handle 12, is configured to accept the shape of guard 11.

Recess 24 has opposed side walls 25 which guide the opposed side walls 26 of guard 11.

Guard 11 has a number of small projections or buttons 27
5 extending from each side wall 26, and the side walls 25 of recess 24 have
corresponding recesses 28. The function of buttons 27 and recesses 28 is to
allow the guard 11 to be retracted along recess 24 and be releasably locked
into preset positions where an opposed pair of buttons 27 click into an
opposed pair of recesses 28. The releasable locking arrangement is such that
10 the surgeon's thumb is able to slide the guard to release the guard from
engagement with the guide means. However, when the surgeon's thumb is
not on guard 11, the guard is held in place sufficiently to prevent it from
inadvertently becoming loose. This arrangement has the advantage that if
only a small part of the cutting blade is required, the guard can be clicked into
15 an only partially retracted position thereby still protecting the remainder of the
cutting edge of the blade against stick injury. The guard can also provide a
means to measure the depth of the cut by exposing only a certain length of
the cutting blade.

The guard has a thumb engageable projection 30 such that a
20 surgeon can grip the guard by projection 30 and can extend or retract the
guard in a single simple motion. Raised wall 21 prevents the surgeon's thumb
from accidentally pushing in finger 20.

Figures 5A-5C and Figures 11-13 show variations to the guard.

In these variations, the guard has an additional fin 31 which sits
25 in slot 13 of blade 10 and functions to keep the blade central. Fin 31 is also
attached to finger 20 such that it is pushed out of the way when the blade is
attached to the scalpel handle.

Figures 6A and 6B illustrate a blade guard 35 which is injection
moulded and consists of two halves 36,37 connected via a hinge line 38. The
30 guard is moulded in a flat configuration illustrated in Figure 6A. The blade 39
(see Figure 6B) is placed on one half 37 and the other half 36 is bent via
hinge line 38 to overlies the first half 37. The halves are snap locked together
by projections 40 on one of the halves which engage into recesses 41 on the

other half.

Referring now to figures 8-15 there is illustrated a first improvement to the known type of scalpel blade assembly described above. This first improvement is directed to an improvement to the method of attachment of the blade assembly to the handle with reduced likelihood of a sharps incident. In the particular embodiment the improvement comprises a removable tab 60 which comprises a head portion 61 and a tail portion 62. Head portion 61 comprises a flat member which can be gripped between a person's fingers or which can be pushed against a hard surface. Tail portion 62 is integrally formed with head portion 61 and is positioned to at least partially fill slot 17 in guard 11. The slot 17 is illustrated in figure 2.

Tail portion 62 is attached to the remainder of guard 11 by a plurality of breakaway portions. In the particular embodiment, two sets of breakaway portions are provided which comprise a first breakable portion (a first neck 63), and a second breakable portion (a second neck 64). Each breakable portion comprises a pair of thin portions which can be torn away.

Referring to figure 12, the first neck 63 comprises a very thin portion which can be immediately broken away. Second neck 64 comprises thicker portions which are not as easily broken away. Thus, initial lifting of head portion 61 will break neck 63 to allow head portion 61 to be quite easily moved away from the rest of guard 11. After that, the tab must be twisted and pulled harder against the underside of blade 10 to allow neck 64 to be broken thereby allowing the tab to be removed entirely from guard 11. This ensures that the tab head 61 has moved sufficiently below with the line of the blade exposure to allow it to be safely operated by hand. Further pulling of the tab rearwardly will result in guard 11 being retracted to expose blade 10. Thus, the guard can be initially retracted as the safety tab is removed.

Figure 15 shows the tab 60 completely removed from guard 11 and shows how guard 11 has been partially retracted to expose blade 10 in a very safe manner.

Another improvement to the scalpel is illustrated in figures 16-21. Briefly, this improvement prevents the guard from lifting out of the handle. The improvement requires modification to the guard and modification to the

handle. Referring to figures 16-21, there is illustrated a modified handle 65. Handle 65 is provided with a recess 66. The recess has a side wall 67. Side wall 67 is provided with a longitudinal rib 68 which is best illustrated in the section view of figure 19. Guard 69 is similar to the guard described above except that one edge wall 70 of the guard 69 is provided with a longitudinal recess 71 which is best illustrated in the section view of figure 18. Thus, guard 69 is firmly held in recess 66 by having rib 68 trapped inside recess 71. This means that the guard 69 cannot be inadvertently lifted out of the recess 66 in handle 65.

Figures 22-25 illustrate another way to prevent the guard from being removed from the handle. Again, this improvement requires modification to the guard and to the handle. Guard 72 (see figure 23) is provided with an engagement means in the form of the safety catch which prevents guard 72 from being retracted too far rearwardly and thus possibly able to be retracted out of the recess 74 in handle 73. Specifically, the front of guard 72 is provided with a peg 75 best illustrated in figure 24. Peg 75 is formed integrally with guard 72 and extends at right angles from the front end of guard 72 such that peg 75 points towards handle 73 (in use). Peg 75 will abut against a stop 76 formed in handle 73 when guard 72 is fully retracted. Thus, guard 72 cannot be retracted too far as peg 75 will prevent this from occurring.

Figures 26-29 illustrate another improvement which is to provide a positive temporary locking of the guard when in the forward and the retracted position. In the embodiment, the arrangement is such to provide an audible "click" sound in the forward position and the retracted position such that the surgeon can be more confident of the guard being fully retracted or extended.

In the embodiment, this is achieved by providing at least one projection which can releasably engage with at least one recess when the guard is in the forward position and the retracted position. Specifically, the projection (locking bump 80) is provided of the handle 81 and the recess (location hole 82) is provided on guard 83. A ramp 84 is provided adjacent a forward part of the scalpel to lift the guard out of locking bump 80 as the

guard is being retracted. Similarly, a ramp 85 is provided to lifted guard out of locking bump 80 when the guard is being extended.


It should be appreciated that various other changes and modifications can be made to the embodiment described without departing
5 from the spirit and scope of the invention as claimed.

Dated this 20th day of September 2002



Occupational & Medical Innovations Pty Ltd
By their Patent Attorneys
CULLEN & CO.

1/12




FIGURES 1-7G
ARE PRIOR ART

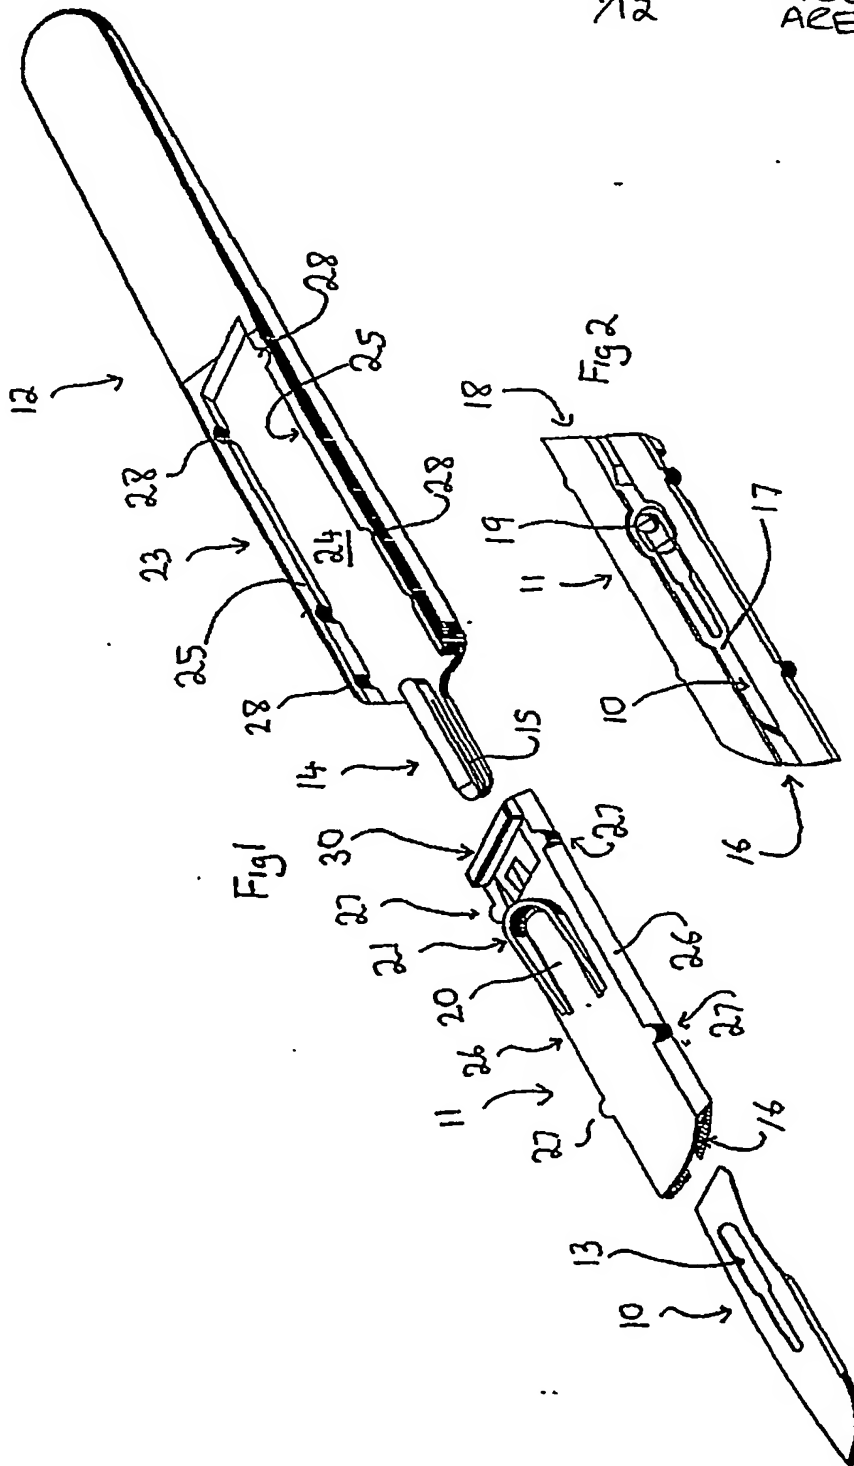


2/12

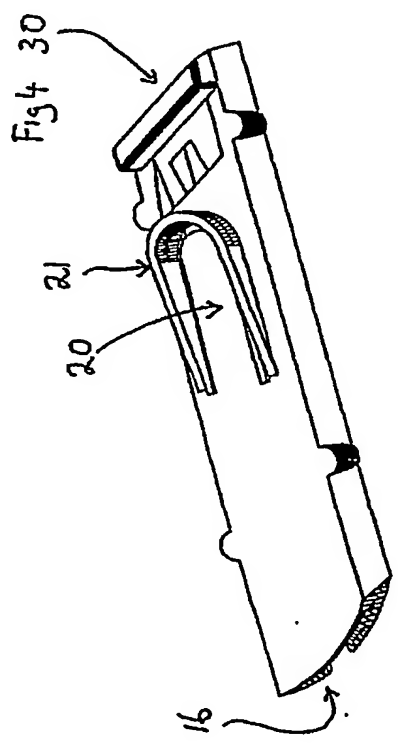
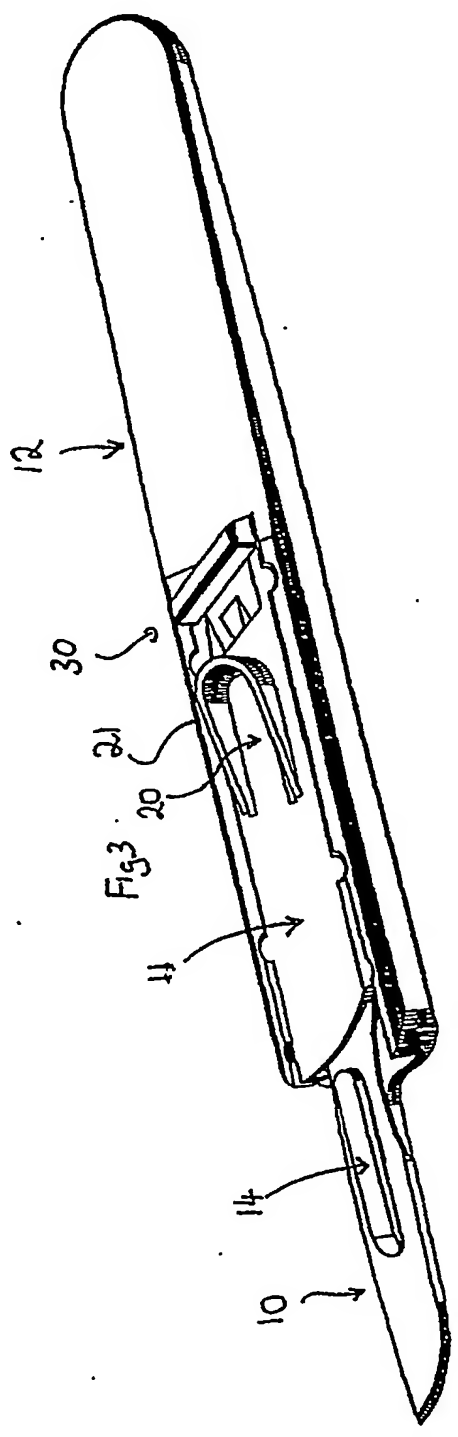


3/12

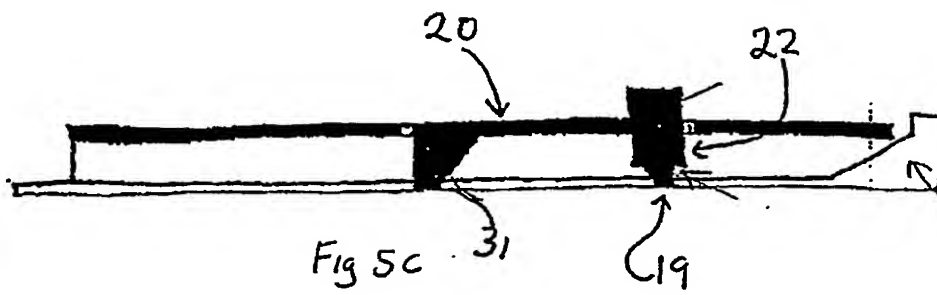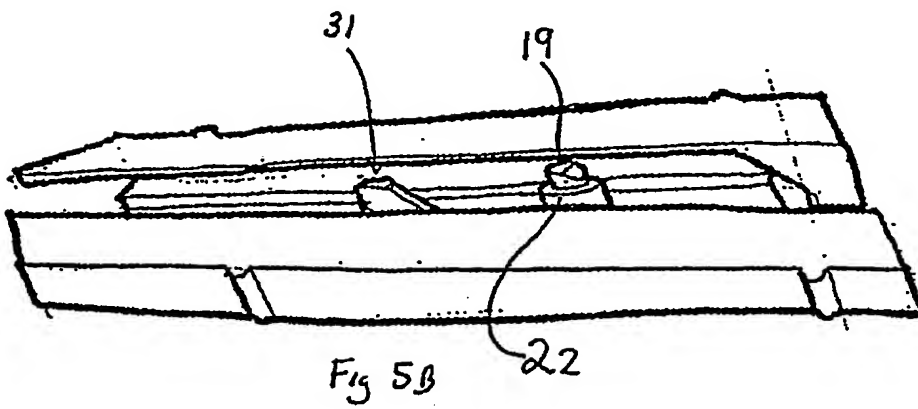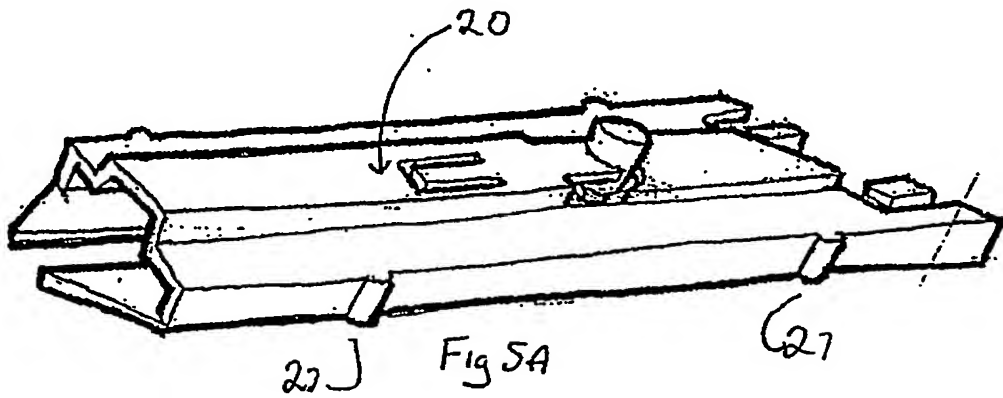

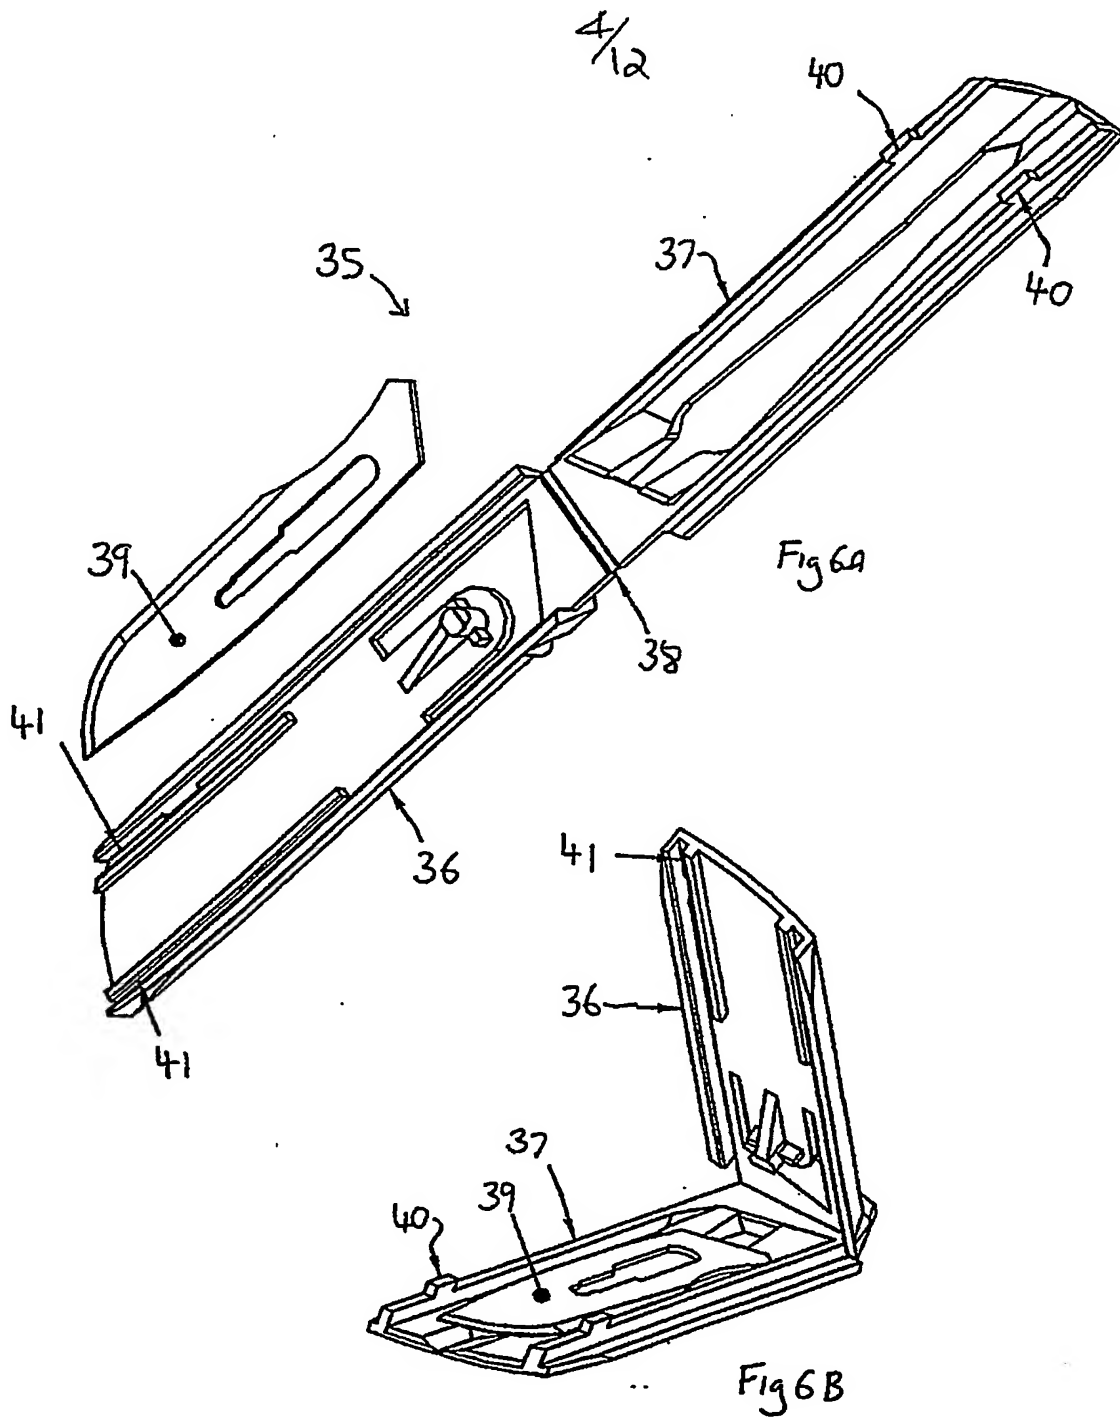

5/12

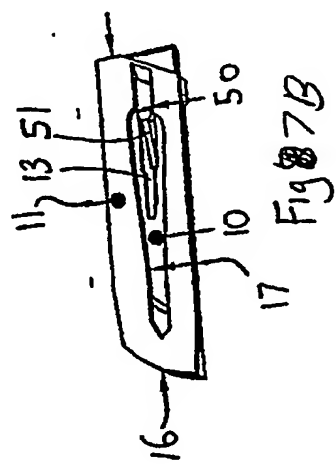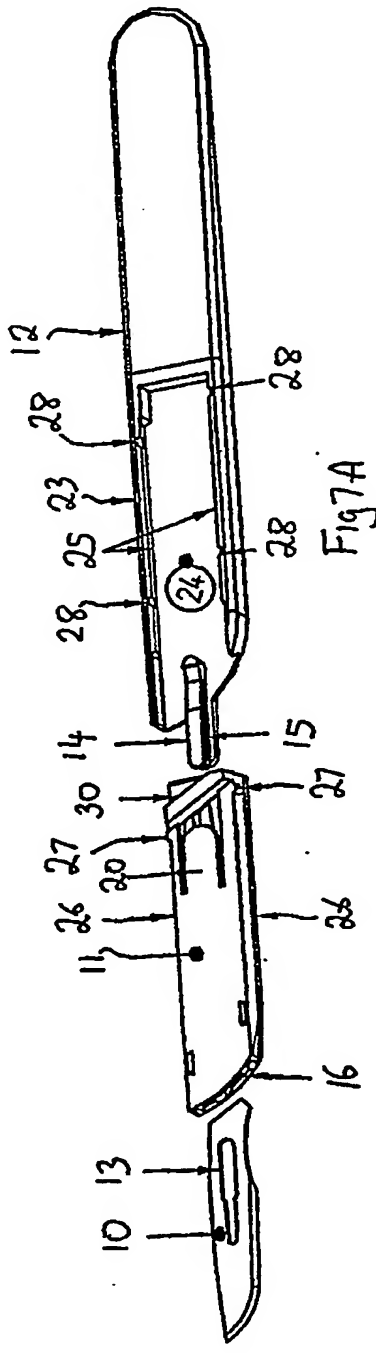

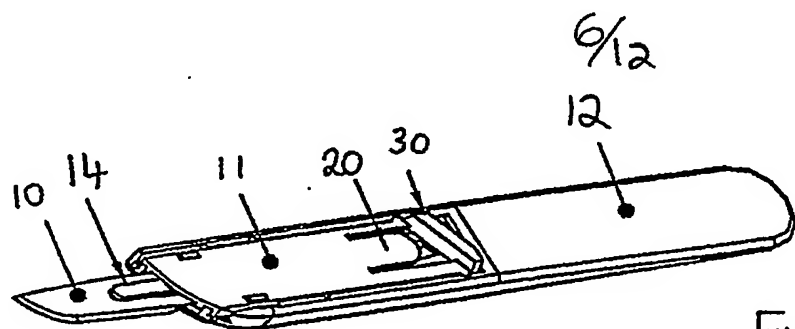


Fig 7C

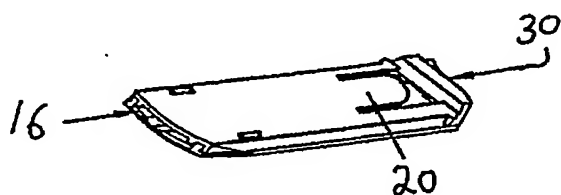


Fig 7D

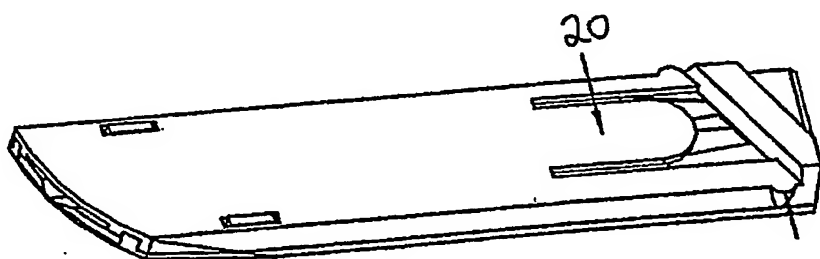


Fig 7E

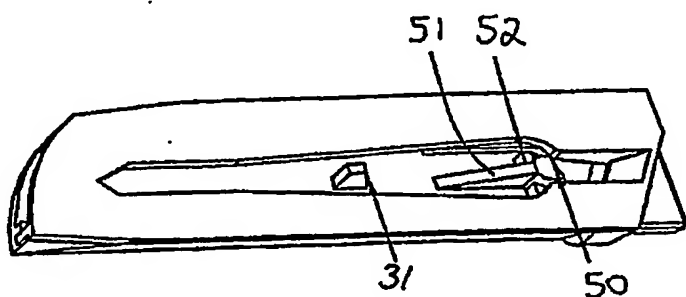


Fig 7F


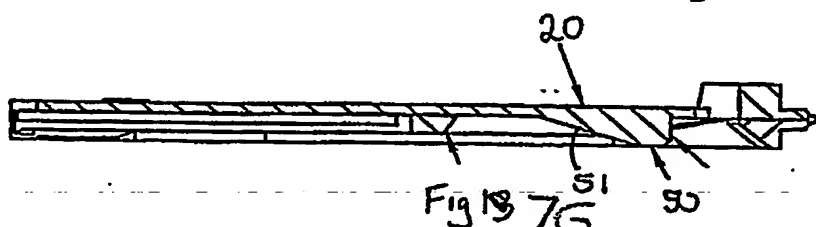


Fig 7G


7/12

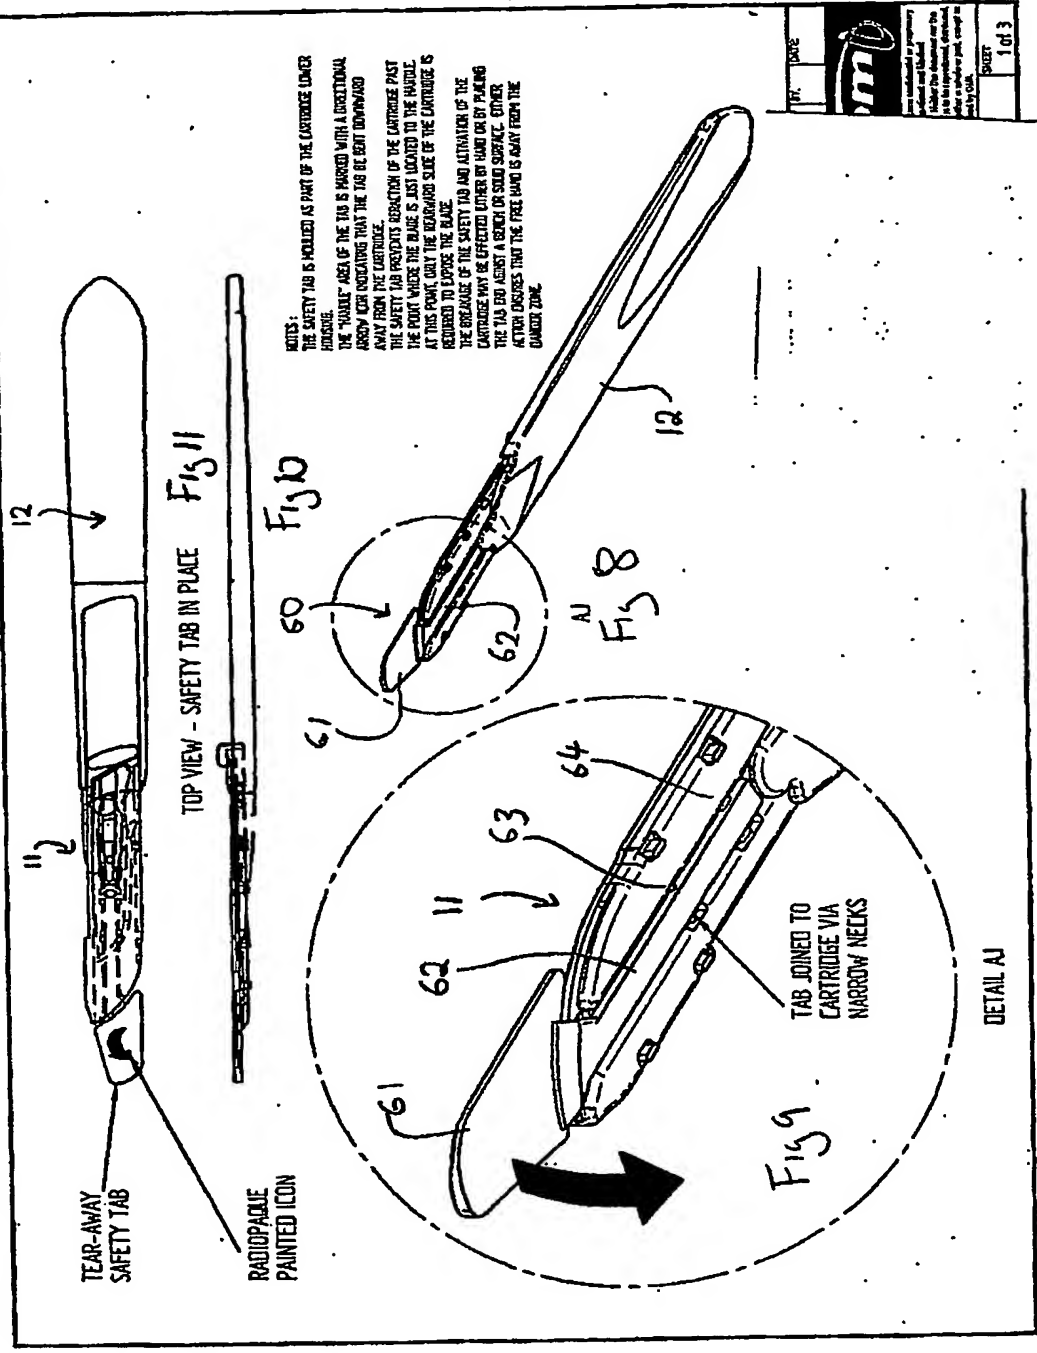

NOTES:
THE SAFETY TAB IS MARKED AS PART OF THE CARTRIDGE UNDER
PRESSURE.
THE "HUMAN" AREA OF THE TAB IS MARKED WITH A DIRECTIONAL
ARROW FOR INDICATING THAT THE TAB BE BENT DOWNWARD
AWAY FROM THE CARTRIDGE.
THE SAFETY TAB PREVENTS DISLOCATION OF THE CARTRIDGE PAST
THE POINT WHERE THE IMAGE IS JUST LOCATED TO THE HANDLE.
AT THIS POINT ONLY THE FORWARD SIDE OF THE CARTRIDGE IS
REQUIRED TO EXPOSE THE IMAGE.
THE RELEASE OF THE SAFETY TAB AND ACTIVATION OF THE
CARTRIDGE MAY BE EFFECTED EITHER BY HAND OR BY PULLING
THE TAB AWAY FROM A SURFACE OR SOLID SURFACE. EITHER
ACTION ASSURES THAT THE FREE HAND IS AWAY FROM THE
DANGER ZONE.

DATE	
REV.	
DESIGNED BY	
CHECKED BY	
APPROVED BY	
DATE	
SHEET	1 of 3


8/12

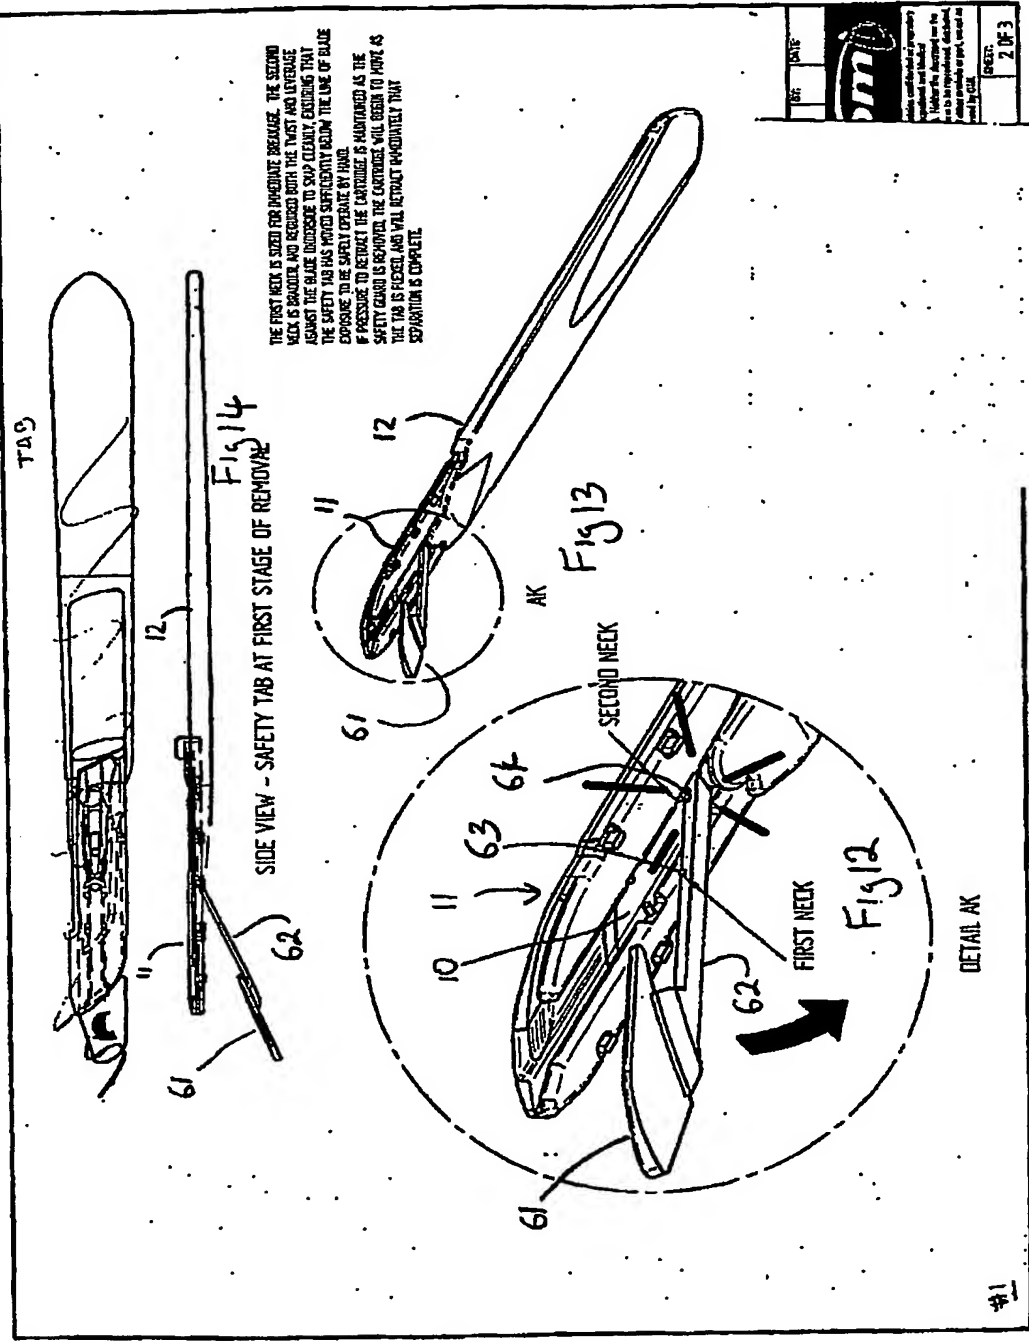



THE FIRST NECK IS SIZED FOR IMMEDIATE BREAKAGE. THE SECOND NECK IS BROKEN AND REMOVED BOTH THE THUMB AND LEVERAGE AGAINST THE BLADE INSURE TO SWAP CLEARLY EXPOSING THAT THE SAFETY TAB HAS MOVED SUFFICIENTLY BEYOND THE LINE OF BLADE EXPOSURE TO BE SAFELY OPERATED BY HAND. IF PERMISSIBLE TO REMOVE THE CARTRIDGE IS MAINTAINED AS THE SAFETY CARTRIDGE IS REMOVED THE CARTRIDGE WILL BEGIN TO MOVE AS THE TAB IS PULLED AND WILL RETRACT IMMEDIATELY THAT SEPARATION IS COMPLETE.

DATE	DESIGN
2 OF 3	

9/12

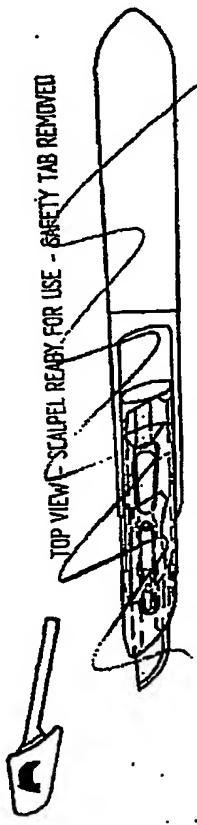

ONCE THE SAFETY TAB HAS SEPARATED, CARTRIDGE RETRACTION CONTINUES AS NORMAL. THE SAFETY TAB IS WASTED. VISIBILITY OF THE TAB IS ENSURED BY THE MULTIDIRECTIONAL, NON-INCORPORATED INTO THE TOP FACE. NO OTHER HANDLING DIRECTIONS ARE INCORPORATED INTO THE CARTRIDGE DESIGN TO AVOID CONSIDERATION. ONLY THE STEP IS USED TO THE OPERATING PROCEDURE, AND NO PERFORMANCE IS AFFECTED.

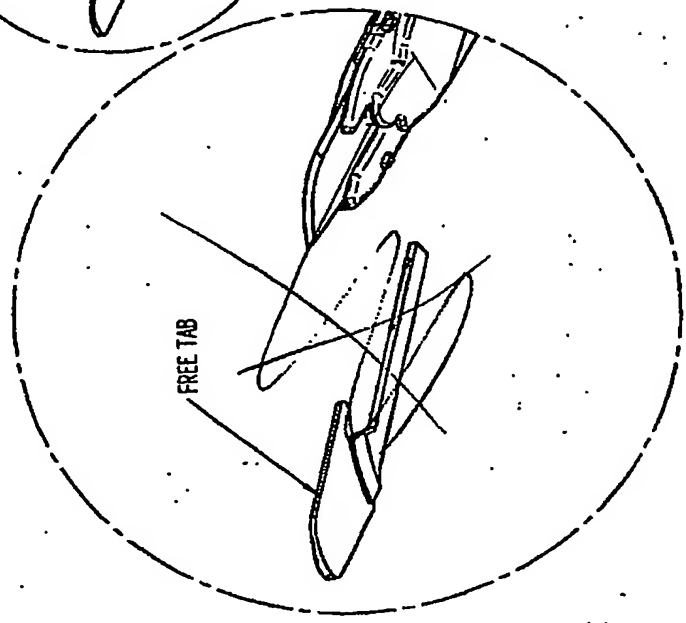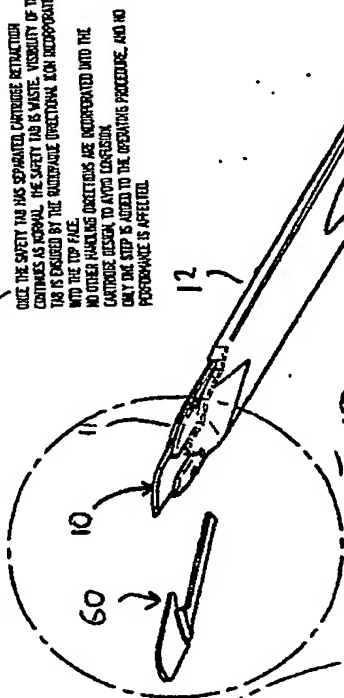

DETAIL AL

DATE	
BY	
APPROVED	
REVIEWED	
DESIGNED	
TESTED	
ASSEMBLED	
SHIPPED	
3 OF 3	

10/12

DATE	
	
<small>Copyright © 2000 by Machining, Inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without permission in writing from Machining, Inc.</small>	
PAGE	1 OF 1

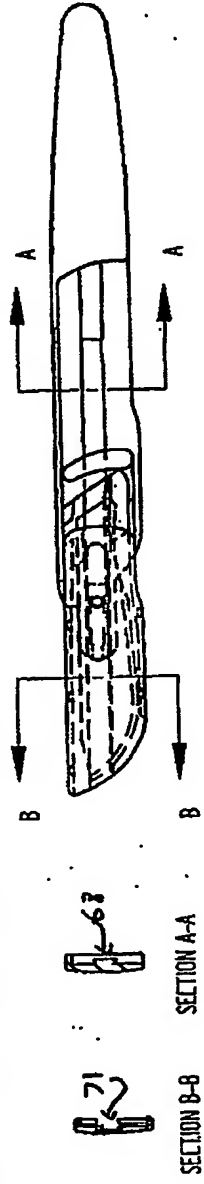


Fig 18

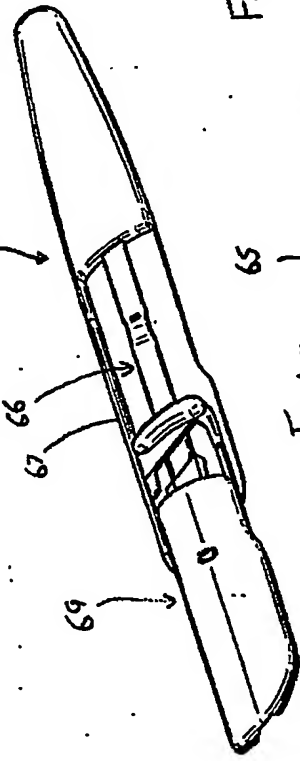


Fig 19

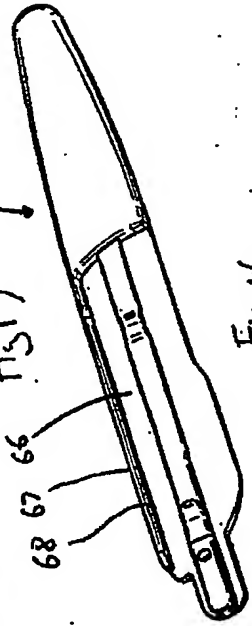


Fig 16

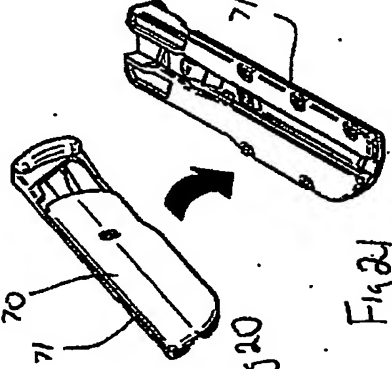


Fig 20





Fig 21

DATE		Confirmed as proprietary in this document use for reproduction, distribution or other use, except as may be permitted in writing by Intel.	SHEET: 1 of 1



12/12

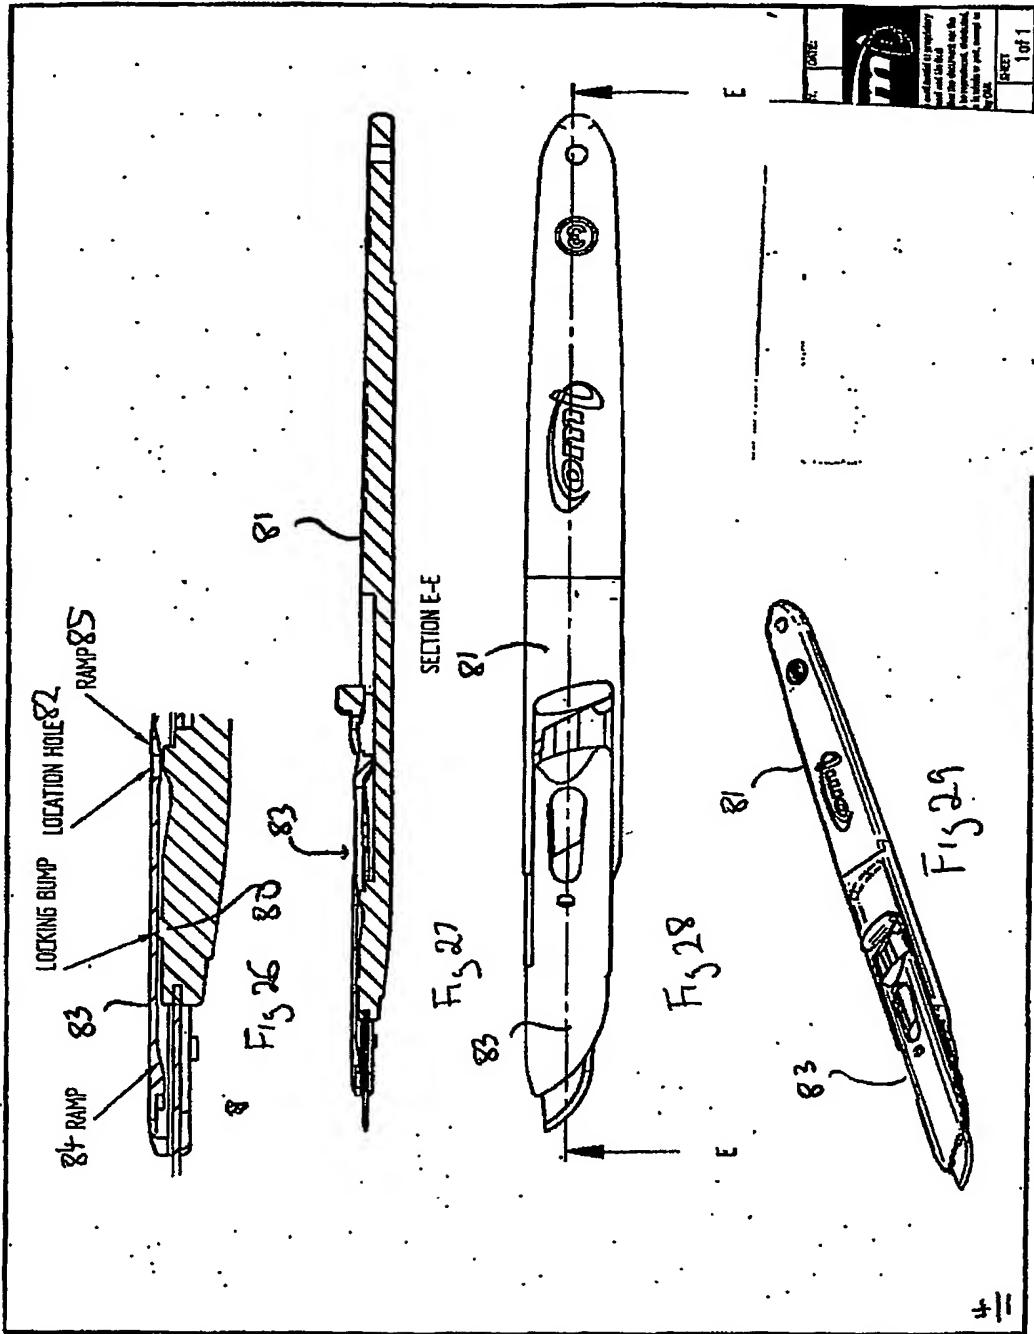

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.